

Package Two Stage

Screw Compressor




Package Two Stage

Screw Compressor



GEA-ITC Two Stage Compressor have the following magnificent features.

- More energy efficiency due to its adjustable valves.
- Custom sizing to match different high stage sliding loads.
- Saving floor space.
- More economic in investment cost.
- Plus all benefits of GEA-FES Microprocessor Controller.

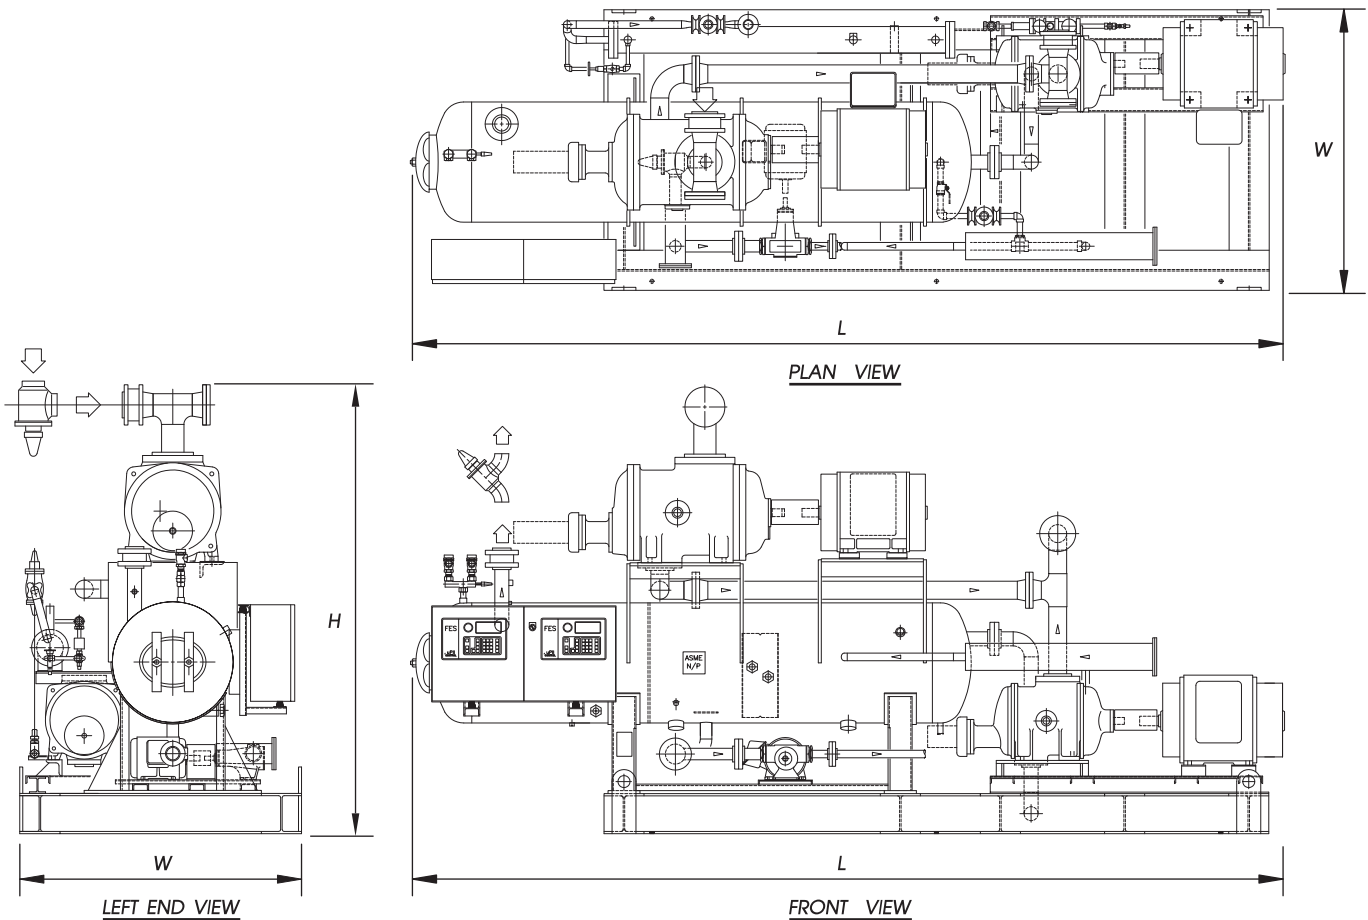

Model 2-STG	Cooling Capacity, @ Evaporating Temperature			Total Power Require for -40 °C kVA	Unit Dimensions			Approx. Weight kg
	-30 °C kW	-40 °C kW	-45 °C kW		Width Metres	Length Metres	Height Metres	
110M/55S	144.9	93.4	75.1	94	1.7	5.5	2.4	2,100
125M/55S	166.4	106.9	85.8	106	1.7	5.0	2.4	2,200
160M/60S	209.0	134.2	107.4	125	1.7	5.0	2.6	3,400
195M/75S	266.5	170.7	136.1	163	1.8	5.7	2.7	4,200
180L/60S	245.9	156.3	125.6	163	1.8	5.7	2.7	4,000
230L/85S	321.6	204.3	163.0	206	1.8	5.7	2.8	4,600
290L/110M	400.2	256.3	203.2	250	1.8	5.7	2.9	5,800
400L/125M	519.7	330.9	261.7	303	2.0	6.5	3.0	6,600
465L/180L	634.7	402.3	317.3	370	2.0	6.7	3.1	7,000
565L/180L	735.8	486.1	369.6	420	2.0	6.7	3.1	7,400
675L/180L	859.0	549.3	434.6	465	2.2	6.8	3.3	7,600
800L/230L	1027.5	655.8	518.6	550	2.2	6.8	3.3	7,900

**SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

คุณลักษณะตามรายละเอียดที่ระบุไว้ สามารถเปลี่ยนแปลงได้ตามต้องการ

