


SERIES - T

## Feel the Uniqueness of **Funnel Freezer**

Stainless steel band belt with side guard on outside edge

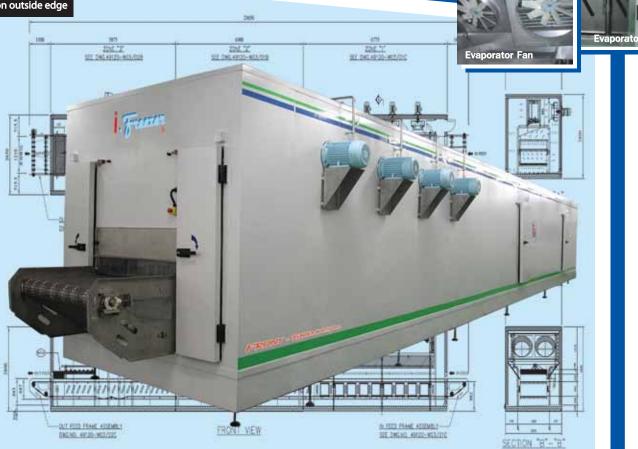

At first glance, most people only determine its performance by its look, simple and common. However, if you thoroughly look at it and observe it for a moment, you will see something new, intriguing and unique inside. This is

"Tunnel Freezer by ITC". It features the following word of unique:

- Unbelievably fast freezing.
- Nominal capacity at wider range.
- Internal structure is made from stainless steel, which prevents it from corrosion.
- Quality control measure is greatly emphasized.
- Uniformly preserves the fresh products.
- Empowered with PLC touch Screen Control for fast and smooth operation.

Figure 1 ITC 's testing laboratory a) A breaded shrimp in pre-test freezing b) A breaded shrimp in post-test freezing c) ITC's thermo data logger

info@itc-group.co.th

## I.T.C. (1993) CO., LTD. 10, 12 ซอยรามคำแหง 118 แยก 61 แขวงสะพานสูง เขตสะพานสูง กทม. 10240

10, 12 Soi Ramkhamhaeng 118 Yak 61, Saphansoong, Saphansoong, Bangkok 10240 Thailand.



(b)

ITC-700-3A-1/2-(01/08/15)

Tel:+66-2184-0055 Fax:+66-2184-0065 www.itc-group.co.th






1

## How does it perform?

ITC has developed the Tunnel Freezer for easy access and convenient operation with direct in-feed and out-feed pathways. We also provide many different conveyor belts, which varies from model and specification. The machine has unique design enclosed with panel of polyurethane foam that serves as insulation. It also produces fast freezing ability in a very short time which can avoid too much weight loss and dehydration caused by light and fragile products. Hence, we boost Tunnel Freezer's performance to preserve every single ounce of the products without losing its quality.

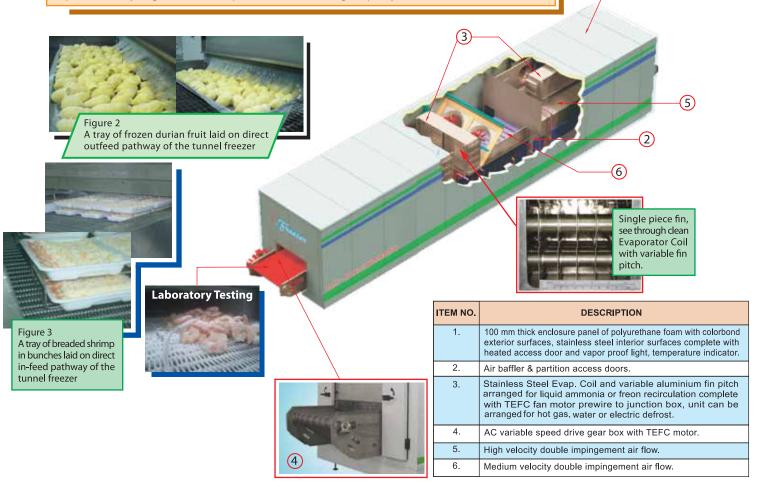

TUNNEL FREEZER DATA						
Model	Nom. Capacity	Belt Width	Eff. Belt Length	Overall Dimension (m)		
TFSA or TFMA	(kg/hr)	(m)	(m)	Length (A)	Width (B)	Height (C)
112105	305	1.2	10.5	12.5	2.2	2.6
115085	310	1.5	8.5	10.5	2.6	2.6
112120	500	1.2	11.2	13.0	2.1	2.1
112175	510	1.2	17.5	19.5	2.2	2.8
115140	515	1.5	14.0	16.0	2.6	2.8
112210	610	1.2	21.0	23.0	2.2	2.8
115165	605	1.5	16.5	18.5	2.6	2.8
112260	755	1.2	26.0	28.0	2.2	2.8
115205	750	1.5	20.5	22.5	2.6	2.8

Note: 1.) Above nominal capacity based on fish fillets with a loading of 5 kg/m<sup>2</sup> at 12 mm thickness, product infeed 10 °C, product out feed -18 °C and Evaporating temperature -40 °C.

2.) Other capacity and dimension are available. Please contact manufacturer.

3.) Specifications subject to change without notice.

