

ABS Shower Head with Stainless Steel Bowl Model 8300



Specifications Shower

Head: 10" ABS plastic in Safety Green

Activation: Rigid stainless steel pull rod operates a stay open chrome plated brass ball valve that is equipped with a stainless steel stem.

Sign: Universal emergency sign included.

Standard: 9" diameter floor flange with 1/4" hot dip galvanized steel pipe. Stanchion incorporates an exclusive cast air gap/supply fitting that separates supply and waste. Two 21" long self adhesive high visibility stripes in Safety Green and bright yellow to improve visibility.

Eyewash

Receptor: 11" stainless steel with #7 bright finish on exterior.

Heads: Twin Soft-Flo® patented ABS plastic anti-surge eyewash heads in Safety Green. Dust covers protect heads and automatically release with water pressure.

Activation: Stainless steel push flag and foot treadle operate a stay open chrome plated brass ball valve that is equipped with a stainless steel ball and stem. Model 8300.158 is push flag operated only.

Stream Control: Steady water flow under varying pressures assured with dual automatic pressure compensation devices.

Strainer: Fully serviceable in-line, 50x50 mesh strainer filters debris from reaching the eyewash.

EYEWASH

Stainless Steel Bowl Model 7400

Specifications

Receptor: 11" stainless steel with 47 bright finish on exterior.

Head: Twin Soft-Flo® patented ABS plastic anti-surge eyewash heads in Safety Green. Dust covers protect heads and automatically release with water pressure.

Activation: Stainless steel push flag operates a stay open chrome plated brass ball valve that is equipped with a stainless steel ball and stem.

Sign: Universal emergency sign included.

Color: Safety Green, per ANSI Z535.1-1991 designating safety and location of first aid and safety equipment.

Stream Control: Steady water flow under varying pressures assured with dual automatic pressure compensation device.

Strainer: Fully serviceable in-line, 50x50 mesh strainer filters debris from reaching the eyewash.



I.T.C. (1993) CO., LTD.

10, 12 ซอยรามคำแหง 118 แยก 61 แขวงสะพานสูง เขตสะพานสูง กทม. 10240
10, 12 Soi Ramkhamhaeng 118 Yak 61, Saphansong, Saphansong, Bangkok 10240 Thailand.

Tel : +66-2184-0055 Fax : +66-2184-0065

www.itc-group.co.th

info@itc-group.co.th



PORTABLE Gravity Operated Eyewash Model 7500

Specifications

Tank: 16 gallon capacity FDA high-density polyethylene material.

Portability: Has single top handle for easy carrying when empty and dual double-wide integral side handles to facilitate two person handling when filled.

Features: Threaded cap and wide fill opening for easy filling, inspection and cleaning. In stand-by position, eyewash heads are protected in a recessed area from airborne debris. Drain hose provided with unit. No loose parts to get lost or damaged.

Color: Highly visible yellow arm distinguishes itself from the Safety Green tank allowing it to be located and activated.


Flushing Time: Over 15 minutes of full flow pattern at not less than 0.4 GPM (1.5 liters per minute).

Mounting: Can be wall mounted (bracket included) or shelf mounted.

Preservative: Preservative Bacteriostatic additive to permit storage of water for several months



URO BIOMASK

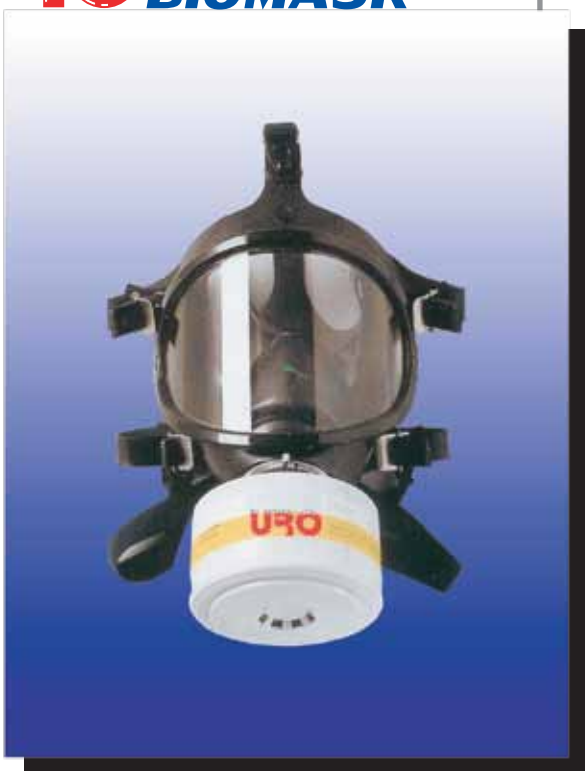

Specifications

- A full face mask for filter cartridges with a panoramic visor compatible with all kinds of dust and gas filters with a EN148-1 & DIN3182 threading.
- Made of high quality block neoprene
- Replaceable neutral panoramic anti-chlorine and anti-scratch visor
- Easy and quick donning thanks to a 5 strap pre-adjusted System

Limitations of use

- Do not use in atmosphere with a concentration of Oxygen below 17%
- Do not use if toxic concentration is superior to OEL